


WELLO active lining pipe



When the use of sealing collars is not possible, lining pipes are installed, which enable the subsequent water-tight lead-through of the medium pipe into the building.


The cost-efficient PE lining pipe is available at short notice ex stock in dia. 100 to 400 mm. Its inner surface is smooth. The corrugated outside ensures a firm bond with the concrete. Two swelling tapes applied centrally around the lining pipe act as waterstops.

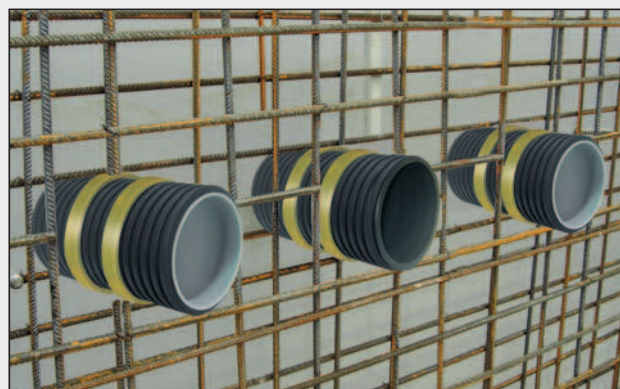

Tested for impermeability up to 20 m water column



Double security due to corrugation and swelling tape

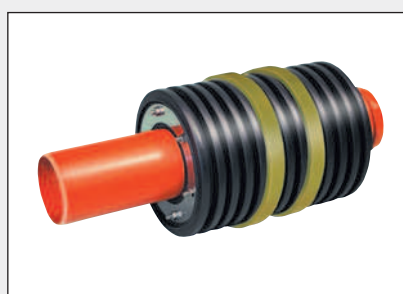

Waterproofing with gasket insert



Waterproofing with modular seal

WELLO inner Ø mm	Standard lengths								
	200 mm	240 mm	250 mm	300 mm	350 mm	365 mm	400 mm	500 mm	600 mm
DN 100	080130	080131	080132	080133	080134	080135	080136	080137	080138
Weight/pc.	0.28 kg	0.31 kg	0.32 kg	0.35 kg	0.39 kg	0.40 kg	0.43 kg	0.50 kg	0.57 kg
DN 125	080140	080141	080142	080143	080144	080145	080146	080147	080148
Weight/pc.	0.33 kg	0.36 kg	0.37 kg	0.42 kg	0.46 kg	0.48 kg	0.51 kg	0.60 kg	0.69 kg
DN 150	080150	080151	080152	080153	080154	080155	080156	080157	080158
Weight/pc.	0.44 kg	0.49 kg	0.51 kg	0.57 kg	0.64 kg	0.66 kg	0.70 kg	0.84 kg	1.01 kg
DN 200	080160	080161	080162	080163	080164	080165	080166	080167	080168
Weight/pc.	0.67 kg	0.75 kg	0.77 kg	0.88 kg	0.99 kg	1.02 kg	1.10 kg	1.31 kg	1.53 kg
*DN 250	080170	080171	080172	080173	080174	080175	080176	080177	080178
Weight/pc.	0.94 kg	1.07 kg	1.10 kg	1.27 kg	1.43 kg	1.48 kg	1.59 kg	1.92 kg	2.24 kg
DN 300	080180	080181	080182	080183	080184	080185	080186	080187	080188
Weight/pc.	1.19 kg	1.36 kg	1.41 kg	1.62 kg	1.83 kg	1.90 kg	2.04 kg	2.47 kg	2.89 kg
*DN 350	080190	080191	080192	080193	080194	080195	080196	080197	080198
Weight/pc.	1.70 kg	1.96 kg	2.02 kg	2.35 kg	2.67 kg	2.77 kg	3.00 kg	3.65 kg	4.30 kg
DN 400	080200	080201	080202	080203	080204	080205	080206	080207	080208
Weight/pc.	2.14 kg	2.47 kg	2.56 kg	2.98 kg	3.40 kg	3.52 kg	3.82 kg	4.66 kg	5.50 kg

Special lengths: Any intermediate lengths can be supplied. * DN 250 + DN 350 waterproofing with modular seal only
Up to length of 600 mm, the price will be that of the next higher stock length.
Maximum length of lining pipe: 2000 mm

We recommend installation with the closure plug